


**FRONT VIEW** 


## NOTES:

- 1. TANK IS MANUFACTURED FROM HDPE OR XLPE. (1.5, 1.9, OR 2.2 SG) 2. TANK IS MANUFACTURED TO ASTM-D-1998 STANDARD.
- 3. ALL TANK DIMENSIONS ARE SUBJECT TO A +/-3% TOLERENCE.
- 4. FLEXIBLE COUPLINGS ARE REQUIRED FOR ALL EXTERNAL PIPING.
- 5. ALL FITTING GASKETS ARE EPDM OR VITON.
- 6. ACO RECOMMENDS ALL FLANGE GASKETS TO BE MIN. 1/4" THICK.
- 7. ON LARGER SIZED TANKS SOME MECHANICAL FITTINGS MAY
- NEED TO BE REMOVED IN ORDER TO AVOID WIDE OR OVERSIZED LOADS.

  8. HDPE ALIGNMENT WEDGES ARE REQUIRED ON SOME TOP FITTINGS TO KEEP THEM PERPENDICULAR TO THE GROUND.
- 9. TANK MUST BE PROPERLY VENTED TO PREVENT PRESSURE OR VACUUM FROM DEVELOPING AS THE TANK IS FILLING OR EMPTYING.
- 10. ONLY ONE BOTTOM OUTLET FITTING MAY BE INSTALLED.
- 11. BOTTOM OUTLET FITTING MAY ONLY BE INSTALLED ON A
- FITTING FLAT LOCATED AT 0°, 90°,180° OR 270°.
- 12. CONTAINMENT TANK IS 1.5SG AS STANDARD.

MATERIALS LIST				
DESCRIPTION	NOTES			
DMT-2205 PRIMARY TANK				
DMT-2205 CONTAINMENT TANK				
16" LID WITH LOCKING STRAP				
	DESCRIPTION  DMT-2205 PRIMARY TANK  DMT-2205 CONTAINMENT TANK			

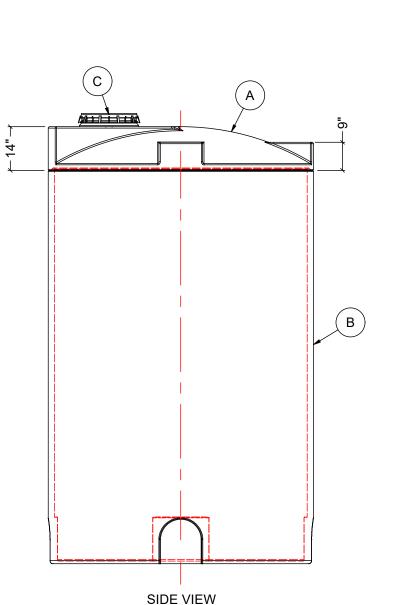

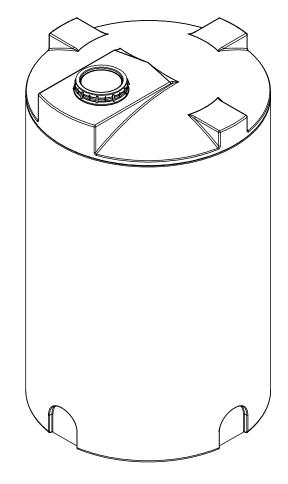

1	NOV-11-21	MODIFIED LID PLACEMENT						
REV	DATE	DESCRIPTION			APPD	REVD		
REVISIONS								
CUSTOMER								
TITLE			ACO JOB NO:					
2200 IG / 2640 USG / 10,000 L DOUBLE WALL TANK			PO#:					
			EQUIP. NO:					

THIS DRAWING IS THE PROPERTY OF ROTOPLAST INC. AND SHALL NOT BE COPIED OR TRANSFERRED WITHOUT THE WRITTEN CONSENT OF ROTOPLAST INC.



ENGINEERO GEAE	ACO CONTAINER SYSTEMS DIVISION OF ROTOPLAST INC. 794 McKAY ROAD PICKERING, ONTARIO, CANADA
	TEL: 905-683-8222
	WEB: ACOTAINERS.COM

DESIGNED DRAWN CHECKED APPROVED SCALE DATE JAN-07-2021

DMT-2205